

# UFM-DWG Series

## Clamp on Transit Time Ultrasonic Flow Meter For 2.5 in to 10 in Pipes

### DESCRIPTION

The UFM-DWG transit time ultrasonic flow meter measures volumetric flow of clean water in pipes 10 in. or smaller. By clamping on the outside of the pipe, the ultrasonic meter installs without cutting or tapping the pipe.

### FEATURES

- Clamp-on, non-invasive flow meter
- Bidirectional flow measurement system
- Measures flow rate, total and velocity of water flow
- Set up the meter through keypad interface or with SoloCUE® Flow Device Manager software
- Compact enclosure uses large, easy-to-read graphical display
- Modbus RTU or BACnet MS/TP over RS485 and BEACON®/AquaCUE® connectivity

### BENEFITS

- Reduces installation costs, especially retrofits
  - ◇ Installs without cutting into the pipe
  - ◇ Eliminates flanges and pipe fittings
  - ◇ Eliminates draining and air purging
- Eliminates ingress or leak points in pipes
- No moving parts to maintain
- No pressure head loss

### APPLICATION

The UFM-DWG meter is well suited for building automation, water distribution and wastewater collection in new and retrofit applications. In addition to having lower installation costs than an inline flow meter, the UFM-DWG meter can be installed while the system continues to operate without interruption.

The UFM-DWG meter is suitable for:


- Potable water
- Reclaimed water
- Chiller water
- Boiler feed water
- Make-up water
- Condenser water
- Condensate



By connecting the UFM-DWG meter to Badger Meter® AquaCUE or BEACON analytics cloud service, the meter becomes part of a system that tracks and monitors water use for commercial buildings, campuses and other large facilities.

### OPERATION

Transit time flow meters use two transducers that function as both ultrasonic transmitters and receivers. The flow meters operate by alternately transmitting and receiving a frequency-modulated burst of sound energy between the two transducers. The burst is first transmitted in the direction of fluid flow and then against fluid flow. Since sound energy in a moving liquid is carried faster when it travels in the direction of fluid flow (downstream) than it does when it travels against fluid flow (upstream), a differential in the times of flight will occur. The sound's time-of-flight is accurately measured in both directions and the difference in time-of-flight calculated.

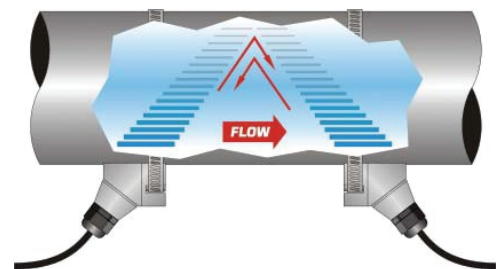

## SPECIFICATIONS

### System

<b>Liquid Types</b>	Water containing small amounts of suspended solids or gas bubbles	
<b>Velocity Range</b>	0.1...40 ft/s (0.03...12 m/s) bidirectional	
<b>Flow Accuracy</b>	JZ, KZ, NZ, RZ, WZ CA-CT	> 2 in. (50 mm) ±1% of reading or ±0.01 ft/s (0.003 m/s), whichever is greater 1...2 in. (25...50 mm) ±1% of reading ±0.03 ft/s (0.01 m/s) 3/4 in. (20 mm) and smaller are accurate to ±1% full scale
<b>Repeatability</b>	±0.2% of reading	
<b>Transducer Type</b>	Clamp-on ultrasonics	
<b>Certifications</b>	Remote mount transmitter and integral mount transmitter with transducers	General Safety (option): FM Class 3810:2018, ANSI/ISA 61010-1:2012, ANSI/IEC 60529:2004, CAN/CSA-C22.2 No. 61010-1:2012, CSA C22.2 No. 60529:2005 CE: EMC Directive 2014/30/EU

### Transmitter

<b>Power Requirements</b>	DC	Class II power supply is required; 9...28V DC @ 5 W maximum
	Protection	Reverse polarity and transient suppression
<b>Display</b>	Keypad	4-button navigation, membrane keypad with domed tactile feedback
	Resolution	128 × 64 pixel LED backlit graphical display; adjustable brightness and timeout
<b>Enclosure</b>	IP66; polycarbonate	
<b>Ambient Temperature</b>	Operational ambient	With display: -4...140° F (-20...60° C); without display: -40...158° F (-40...70° C)
	Storage	-40...176° F (-40...80° C)
<b>Units of Measure</b>	Velocity	feet/second, meters/second
	Totals	US Gallons, Million Gallons, Imperial Gallons, Million Imperial Gallons, Acre-Feet, Barrels, Liters, Hectoliters, Cubic Meters, Cubic Feet
	Flow rate	Acre Feet/Day, Liters/Second, Liters/Minute, Liters/Hour, Cubic Meters/Second, Cubic Meters/Minute, Cubic Meters/Hour, Cubic Feet/Minute, Cubic Feet/Minute, Cubic Feet/Hour, Gallons/Second, Gallons/Minute, Gallons/Hour, Million Gallons/Day, Imperial Gallons/Second, Imperial Gallons/Minute, Imperial Gallons/Hour, Barrel/Minute, Million Imperial Gallons/Day, Barrel/Day
<b>Mounting</b>	Wall or pipe remote mount or integral mount; Enclosure can be rotated in 90° increments	
<b>Inputs</b>	Digital input	5...30V DC, 3.48k Ohm impedance, externally or internally sourced; totalizer reset or alarm unlatch
<b>Outputs</b>	Pulse / Frequency / Digital /	Two outputs, each selectable as frequency, pulse, forward/reverse flow or alarm output; isolated open collector, 5...30V DC, 50 mA maximum, externally or internally sourced with pullup resistor Digital alarm output: configurable high or low Frequency output: 63 Hz...10 kHz maximum Pulse (totalizer) output: 100 Hz maximum output open collector, pulse width 5...500 ms programmable
	Analog Output	0...20 mA and 4...20 mA drive up to 800 Ohms; minimum 16-bit resolution, isolated
<b>Networks</b>	EIA-485 with selectable protocols	Modbus RTU, baud rates 9600, 19200, 38400, 57600, 76800, 115200 BACnet MS/TP, baud rates 9600, 19200, 38400, 57600, 76800, 115200
	Endpoints	Connectivity to AquaCUE or BEACON cellular endpoints
<b>Configuration Port</b>	USB, Type mini-B	
<b>Alarms</b>	Buffer previous alarms, warnings or errors	
<b>Languages</b>	English, French, German and Spanish selectable	
<b>Security</b>	Four levels: Read-only, Operator, Service and Admin; 6-digit passcode number; selectable auto logout	

## Transducers

Model	Construction	Cable Length	Pipe/Tubing Sizes <sup>2,3</sup>
CA...CT, Fixed small pipe	CPVC, Ultem, Nylon cord grip Polyethylene cable jacket; -40...194° F (-40...90° C) <sup>1</sup>	100 ft (90 m) max.	0.5...2 in. (12...50 mm)
RZ (IP54), Standard pipe	PBT glass filled, Ultem®, Nylon cord grip PVC cable jacket; -40...250° F (-40...121° C)	300 ft (90 m) max.	2.5...10 in. (DN65...DN250)
NZ (IP67), Standard pipe	CPVC, Ultem, Nylon cord grip Polyethylene cable jacket; -40...194° F (-40...90° C)	300 ft (90 m) max.	2.5...10 in. (DN65...DN250)
WZ (IP68), Standard pipe, Submersible	CPVC, Ultem, Nylon cord grip Polyethylene cable jacket; -40...194° F (-40...90° C)	300 ft (90 m) max.	2.5...10 in. (DN65...DN250)
JZ, KZ (IP54), Standard pipe, Integrated rail	PBT glass filled, Ultem®, Nylon cord grip PVC cable jacket; -40...250° F (-40...121° C)	100 ft (30 m) max.	2.5...6 in. (DN65...DN150) 2.5...10 in. (DN65...DN250)

<sup>1</sup> CA...CT integral mount temperature is limited by the transmitter temperature rating.

<sup>2</sup> Recommendations based on unlined, new pipes with water. Recommended pipe or tubing sizes vary with pipe conditions and fluid.

<sup>3</sup> PVC, CPVC, HDPE, PTFE, PDVF, stainless steel, ductile iron, aluminum, brass naval, carbon steel copper. Conduit not available with Easy Rail.

## Configuration Software

The flow meter can be programmed and configured with the SoloCUE Flow Device Manager software. The software also has troubleshooting tools for diagnosing and correcting installation problems.

<b>SoloCUE</b>	Used to configure and troubleshoot flow meter. Software is compatible with Windows® 7 SP1, 8, 10
----------------	--

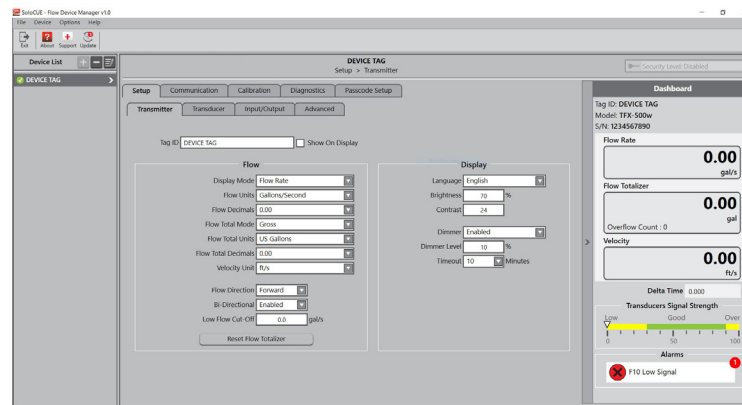


Figure 1: SoloCUE setup screen

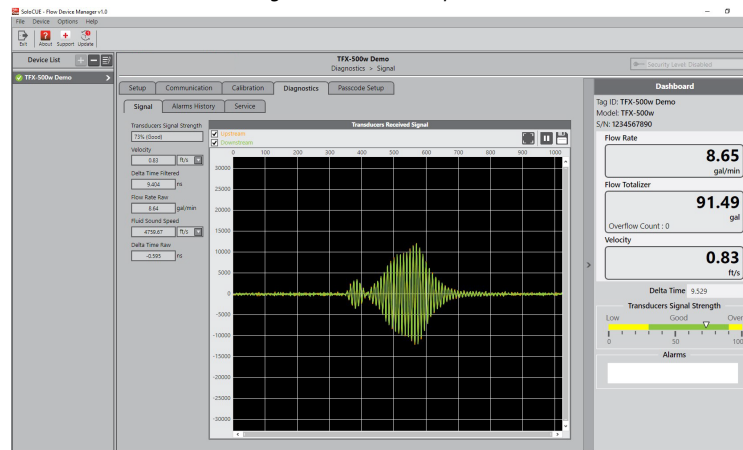


Figure 2: SoloCUE diagnostics screen


## Additional Parts Required for Configuration

Part Number	Description
RC820648	USB Type A to mini B software cable (shielded to minimize noise)


## DIMENSIONS

### UFM-DWG Meter


Enclosure, Integral and Remote, Front View

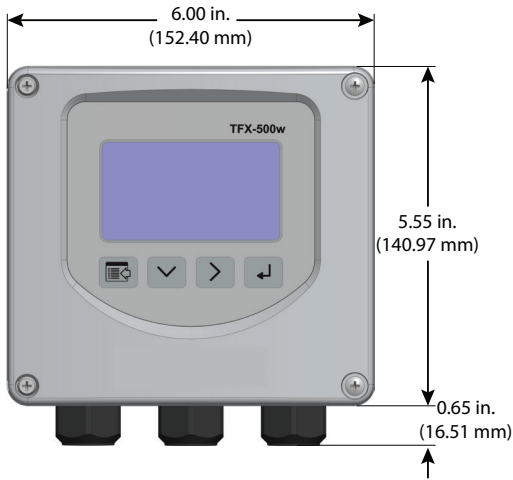

Integral Enclosure Side View

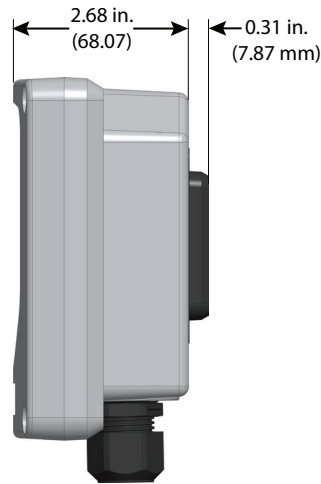

Remote Enclosure Side View

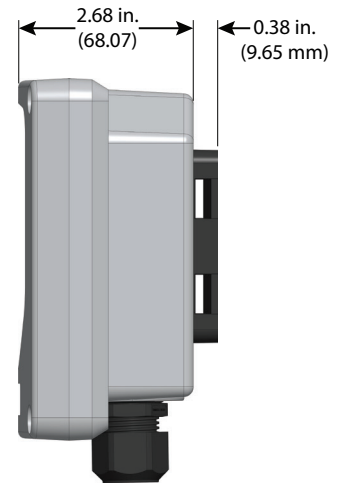


### Transducers

#### Remote System with Standard Pipes

##### NZ/RZ/WZ (W, V or Z mount)


RZ (optional alignment rail)

NZ/WZ

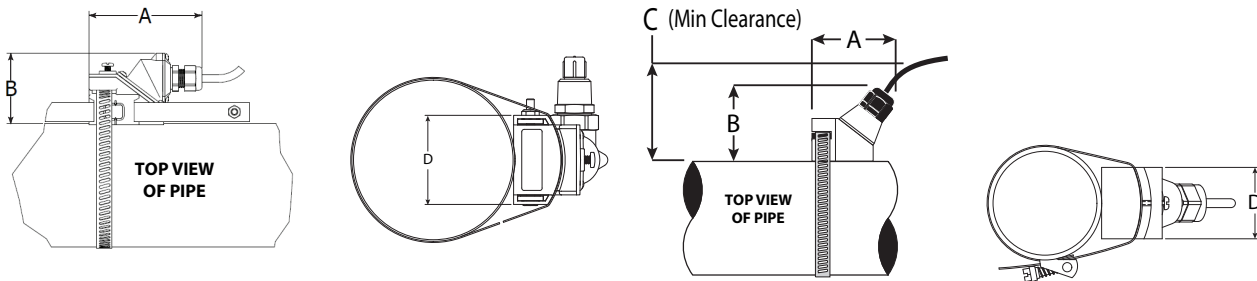

Model	A	B	C	D
RZ	3.75 in. (95.25 mm)	2.35 in. (59.69 mm)	—	2.19 in. (55.63 mm)
NZ, WZ	2.95 in. (74.93 mm)	2.75 in. (69.8 mm)	3.00 in. (76.2 mm)	1.70 in. (43.2 mm)

##### Easy Rail JZ/KZ (W or V mount)

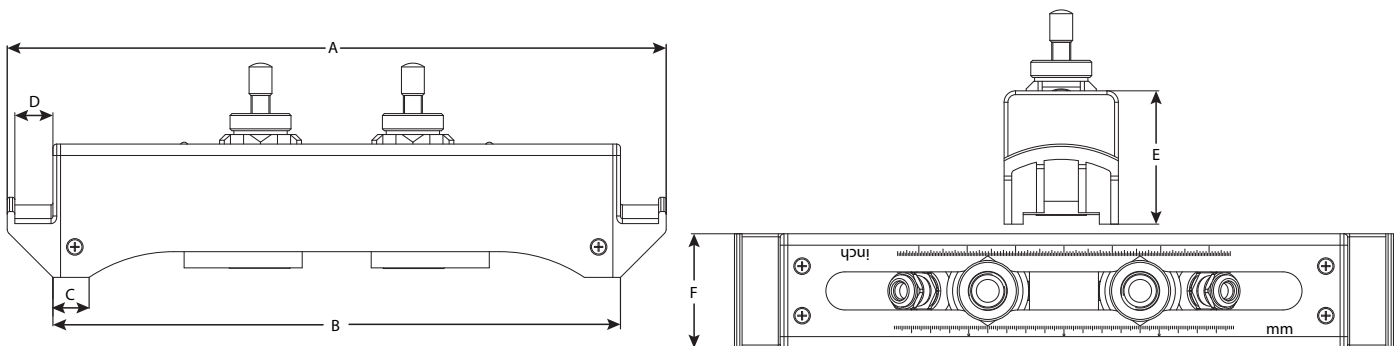


Model	A	B	C	D	E	F
JZ	13.62 in. (345.95 mm)	11.73 in. (297.94 mm)	0.75 in. (19.05 mm)	0.79 in. (20.06 mm)	2.76 in. (70.10 mm)	2.36 in. (59.94 mm)
KZ	19.92 in. (505.97 mm)	18.03 in. (457.96 mm)	0.75 in. (19.05 mm)	0.79 in. (20.06 mm)	2.76 in. (70.10 mm)	2.36 in. (59.94 mm)

## Remote System with Small Pipes

### CA...CT

CA...CT (except CF and CL)  
Pipes and Tubing  
1/2...2 in.

CF and CL U-Bolt Connections  
ANSI Pipe and Copper Tubing  
2 in. Models

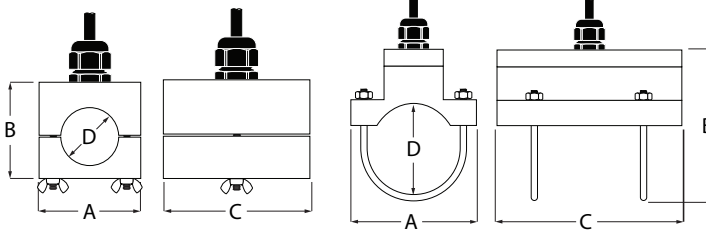


## Integral System

### CA...CT

CA...CT (except CF and CL)

CF and CL U-Bolt Connections

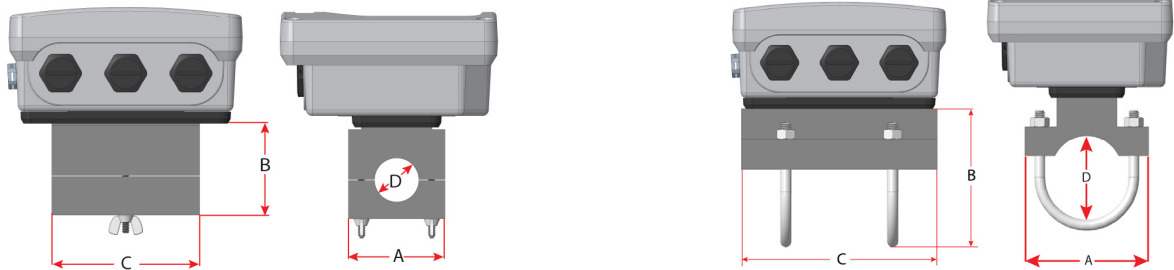

Pipe Size	Pipe Material	A	B	C	D
1/2 in.	ANSI/DN	2.46 in. (62.48 mm)	2.36 in. (59.94 mm)	2.66 in. (67.56 mm)	0.84 in. (21.34 mm)
	Copper	2.46 in. (62.48 mm)	2.36 in. (59.94 mm)	3.33 in. (84.58 mm)	0.63 in. (16.00 mm)
	Tubing	2.46 in. (62.48 mm)	2.28 in. (57.91 mm)	3.72 in. (94.49 mm)	0.50 in. (12.70 mm)
3/4 in.	ANSI/DN	2.46 in. (62.48 mm)	2.57 in. (65.28 mm)	2.66 in. (67.56 mm)	1.05 in. (26.67 mm)
	Copper	2.46 in. (62.48 mm)	2.50 in. (63.50 mm)	3.56 in. (90.42 mm)	0.88 in. (22.35 mm)
	Tubing	2.46 in. (62.48 mm)	2.50 in. (63.50 mm)	3.56 in. (90.42 mm)	0.75 in. (19.05 mm)
1 in.	ANSI/DN	2.46 in. (62.48 mm)	2.92 in. (74.17 mm)	2.86 in. (72.64 mm)	1.32 in. (33.53 mm)
	Copper	2.46 in. (62.48 mm)	2.87 in. (72.90 mm)	3.80 in. (96.52 mm)	1.13 in. (28.70 mm)
	Tubing	2.46 in. (62.48 mm)	2.75 in. (69.85 mm)	3.80 in. (96.52 mm)	1.00 in. (25.40 mm)
1-1/4 in.	ANSI/DN	2.80 in. (71.12 mm)	3.18 in. (80.77 mm)	3.14 in. (79.76 mm)	1.66 in. (42.16 mm)
	Copper	2.46 in. (62.48 mm)	3.00 in. (76.20 mm)	4.04 in. (102.62 mm)	1.38 in. (35.05 mm)
	Tubing	2.46 in. (62.48 mm)	3.00 in. (76.20 mm)	4.04 in. (102.62 mm)	1.25 in. (31.75 mm)
1-1/2 in.	ANSI/DN	3.02 in. (76.71 mm)	3.40 in. (86.36 mm)	3.33 in. (84.58 mm)	1.90 in. (48.26 mm)
	Copper	2.71 in. (68.83 mm)	2.86 in. (72.64 mm)	4.28 in. (108.71 mm)	1.63 in. (41.40 mm)
	Tubing	2.71 in. (68.83 mm)	3.31 in. (84.07 mm)	4.28 in. (108.71 mm)	1.50 in. (38.10 mm)
2 in.	ANSI/DN	3.70 in. (93.98 mm)	3.42 in. (86.87 mm)*	5.50 in. (139.70 mm)	2.38 in. (60.45 mm)*
	Copper	3.70 in. (93.98 mm)	3.38 in. (85.85 mm)*	5.50 in. (139.70 mm)	2.13 in. (54.10 mm)*
	Tubing	3.21 in. (81.53 mm)	3.85 in. (97.79 mm)	4.75 in. (120.65 mm)	2.00 in. (50.80 mm)

\*Varies due to U-bolt configuration

## PART NUMBER CONSTRUCTION

DW - 
 G - 
   - 
   - 
   - 
   - 
   - 
 XX - 
   - 
  

Transit Time: Pipes ≤ 2 in.

### CERTIFICATION

General Area, CE

G

### TRANSDUCER TYPE

1/2 in. ANSI pipe  
 3/4 in. ANSI pipe  
 1 in. ANSI pipe  
 1-1/4 in. ANSI pipe  
 1-1/2 in. ANSI pipe 2  
 in. ANSI pipe  
 1/2 in. Copper Tube  
 3/4 in. Copper Tube  
 1 in. Copper Tube  
 1-1/4 in. Copper Tube  
 1-1/2 in. Copper Tube  
 2 in. Copper Tube  
 1/2 in. Stainless Steel Tube  
 3/4 in. Stainless Steel Tube 1  
 in. Stainless Steel Tube 1-1/4  
 in. Stainless Steel Tube 1-1/2  
 in. Stainless Steel Tube 2 in.  
 Stainless Steel Tube

CA  
 CB  
 CC  
 CD  
 CE  
 CF  
 CG  
 CH  
 CT  
 CJ  
 CK  
 CL  
 CM  
 CN  
 CP  
 CQ  
 CR  
 CS

### TRANSMITTER TYPE

24V DC | Meter Mounted  
 24V DC | Remoted Mounted

E  
 F

### DISPLAY

Standard  
 No display with keypad

S  
 W

### REMOTE CABLE LENGTH

None (Meter Mounted)  
 15 ft (4.57 m)  
 30 ft (9.14 m)  
 50 ft (15.24 m)  
 75 ft (22.86 m)  
 100 ft (30.48 m)

WW  
 AC  
 AF  
 AK  
 AR  
 BW

### CONDUIT TYPE AND LENGTH<sup>1</sup>

None  
 15 ft (4.57 m)  
 30 ft (9.14 m)  
 50 ft (15.24 m)  
 75 ft (22.86 m)  
 100 ft (30.48 m)

WW  
 AC  
 AF  
 AK  
 AR  
 BW

### RESERVED

Standard

XX

### UNITS OF MEASURE: TOTALIZER / FLOW RATE

Gallons/gallons per minute  
 Gallons/cubic feet per minute  
 Cubic Meters/cubic meters per minute  
 Cubic Meters/cubic meters per hour  
 Cubic Feet/gallons per minute  
 Cubic Feet/cubic feet per minute  
 Liters/liters per second  
 Liters/liters per minute  
 Liters/liters per hour  
 Million Gallons/gallons per minute  
 Acre Feet/gallons per minute

G  
 B  
 T  
 H  
 F  
 J  
 N  
 P  
 Q  
 M  
 A

### TESTING & TAGGING

Factory Calibrated  
 Factory Calibrated/ID Tag

F  
 S

<sup>1</sup> Conduit length must be less than or equal to cable length. Submersible Conduit limited to 100 ft (30 m). Conduit not available with Easy Rail.



Transit Time: Pipes > 2 in.

**CERTIFICATIONS**

General Area, CE G

**TRANSDUCER TYPE**

Easy Rail   2.5...6 in. (65...150 mm) Pipes	JZ
Easy Rail   2.5...10 in. (65...250 mm) Pipes	KZ
DTTN   2.5...10 in. (65...250 mm) Pipes	NZ
DTTN (Submersible)   2.5...10 in. (65...250 mm) Pipes	WZ
DTTR   2.5...10 in. (65...250 mm) Pipes	RZ

**TRANSMITTER TYPE**

24V DC Remote Mounted F

**DISPLAY**

Standard S  
 No display with keypad W

**REMOTE CABLE LENGTH**

15 ft (4.57 m)	AC
30 ft (9.14 m)	AF
50 ft (15.24 m)	AK
75 ft (22.86 m)	AR
100 ft (30.48 m)	BW
150 ft (45.72 m)	BK
200 ft (60.96 m)	DW
250 ft (76.20 m)	DK
300 ft (91.44 m)	EW

**CONDUIT AND CABLE LENGTH <sup>1</sup>**

None	WW
15 ft (4.57 m)	AC
30 ft (9.14 m)	AF
50 ft (15.24 m)	AK
75 ft (22.86 m)	AR
100 ft (30.48 m)	BW
150 ft (45.72 m)	BK
200 ft (60.96 m)	DW
250 ft (76.20 m)	DK
300 ft (91.44 m)	EW

**RESERVED**

Standard XX

**UNITS OF MEASURE: TOTALIZER / FLOW RATE**

Gallons/gallons per minute	G
Gallons/cubic feet per minute	B
Cubic Meters/cubic meters per minute	T
Cubic Meters/cubic meters per hour	H
Cubic Feet/gallons per minute	F
Cubic Feet/cubic feet per minute	J
Liters/liters per second	N
Liters/liters per minute	P
Liters/liters per hour	Q
Million Gallons/gallons per minute	M
Acre Feet/gallons per minute	A

**TESTING & TAGGING**

Factory Calibrated F  
 Factory Calibrated/ID Tag S

<sup>1</sup> Conduit length must be less than or equal to cable length. Submersible Conduit limited to 100 ft (30 m). Conduit not available with Easy Rail.

## PARTS AND ACCESSORIES

### Couplant

Part Number	Description
D002-2011-001	Dow Corning® Molykote® 111 Grease; 5.3 oz Tube; 150° F (65° C)
D002-2011-002	Dow Corning 732; Permanent Mount; 356° F (180° C)

Dow 111 grease is included with transducers.

### Power Supplies

Part Number	Description
68334-001	Wall Plug; 100...264V AC In; 24V DC Out; -20...50° C
68334-002	Module; 85...264V AC In; 24V DC Out; -30...70° C

For ordering transducers and transmitter separately, please contact factory.

