



SERIES AVLV | LOW AIR VELOCITY TRANSMITTER



BENEFITS/FEATURES

- Minimal preventative maintenance as sensing element is covered with an engineered protective coating
- Easy field setup via the on board dip switches for range and units

APPLICATIONS

- VAV systems
- Building ducts
- Clean room systems

DESCRIPTION


The **Series AVLV Low Air Velocity Transmitter** quickly and accurately measures air velocity or volumetric flow in imperial or metric units. Simultaneous current and voltage outputs on all models provide universal inputs to monitoring equipment while the output range, units, and 0-5/10 VDC, 4-20 mA output can be configured via local DIP switches. The optional integral display, or the portable remote tool, provide a convenient way to locally monitor process values and configure the unit.

Models are available in 1% and 2% accuracy models and low velocity ranges to suit a variety of needs, and the optional BACnet MS/TP or Modbus® RTU/ASCII communication protocol allows units to be daisy-chained while providing access to all of the velocity and flow data, as well as additional information such as air temperature. The lower ranges in these high accuracy units allow for applications in quality intensive environments, such as the pharmaceutical industry.

SPECIFICATIONS


Service	Clean air and non-combustible, compatible gases.
Wetted Materials	Consult factory.
Range	100, 200, 300, 400 FPM (0.5, 1, 1.5, 2 m/s); field selectable.
Accuracy	See chart.
Temperature Limits	32 to 122°F (0 to 50°C).
Power Requirements	24 VDC ±20% or 24 VAC ±20%.
Humidity Limits	5 to 95% RH, non-condensing.
Output Signals	4-20 mA, 0-5 VDC, 0-10 VDC.
Response Time (90%)	4 s, typical; 1 s at constant temperature.
Zero and Span Adjustments	Digital push buttons.
Output Load Resistance	Current output: 0 to 1100 Ω max.; Voltage output: Minimum load resistance 1 kΩ.
Current Consumption	60 mA max.
Display	5 digit LCD (optional).
Electrical Connections	Analog: Power and output: four wire removable European style terminal block for 16 to 26 AWG; Communication: Connections: BACnet MS/TP or Modbus® RTU/ASCII: three wire removable European style terminal block for 16 to 26 AWG.
Supported Communication Baud Rates	9600, 19200, 38400, 57600, 76800, 115200 (optional).
Device Load	1/8 unit load.
Electrical Entry	1/2" NPS thread. Accessory: Cable gland for 5 to 10 mm diameter cable, A-151.
Enclosure Rating	NEMA 4X (IP66).
Mounting Orientation	Flow direction must be parallel to the sensor tip.
Weight	6.0 oz (160 g).
Compliance	BTL, CE.

DIMENSIONS

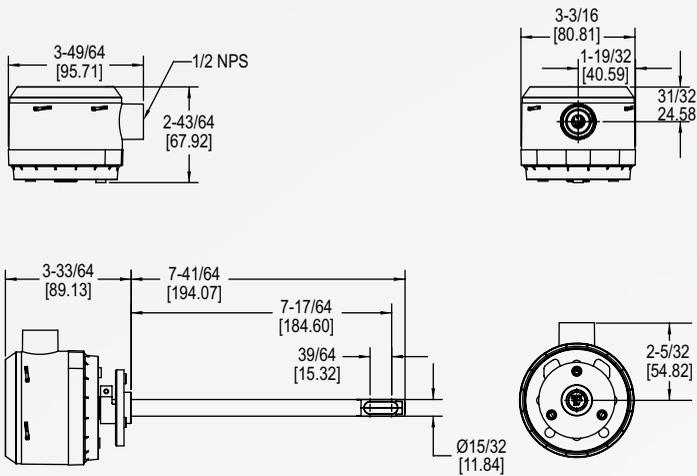

HOW TO ORDER

Use the **bold** characters from the chart below to construct a product code.

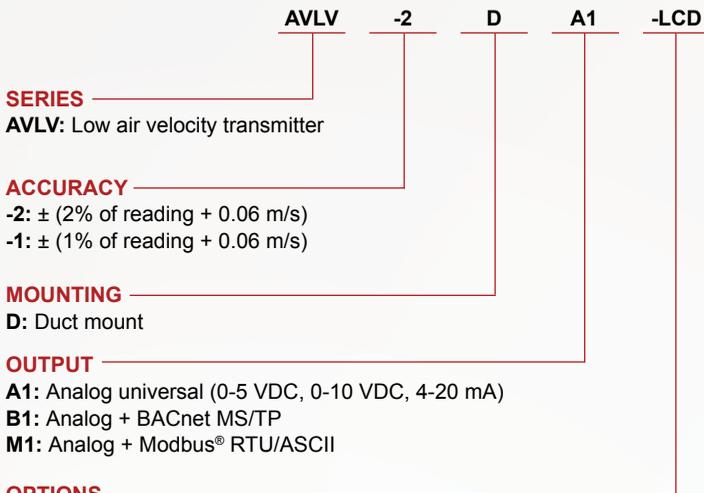


OPTIONS

- LCD: LCD display
- FC: Factory calibration certificate
- NIST: NIST certificate
- GLD: Electrical cable gland


ACCESSORIES

Model	Description
A-AVLV-LCD	Field upgradeable display
A-AVUL-MTG	Replacement duct mount plate assembly


WIRING DIAGRAM

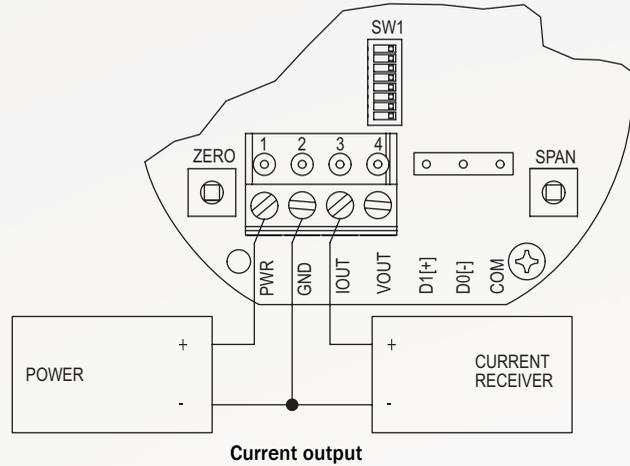

Current output

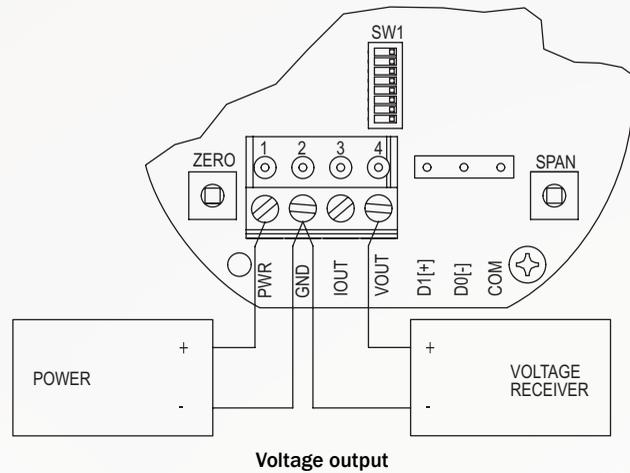

Voltage output

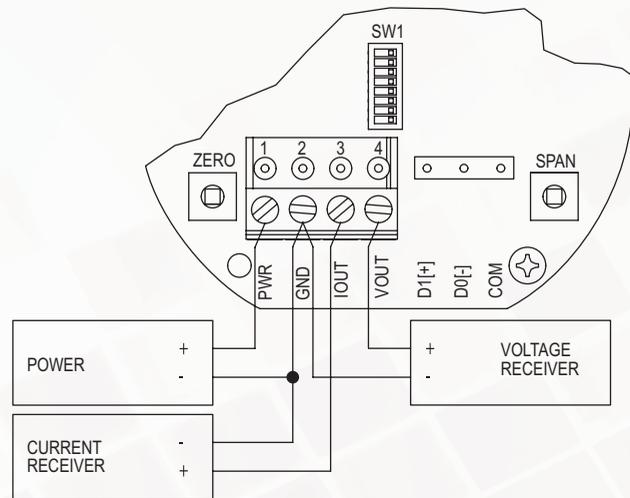

Simultaneous current and voltage output

Modbus® is a registered trademark of Schneider Automation, Inc.



DWYER INSTRUMENTS, LLC

ORDER ONLINE TODAY!

dwyer-inst.com/Product/Series AVLV

©Copyright 2022 Dwyer Instruments, LLC
Printed in U.S.A. 2/22

DS-AVLV Rev. 3

Important Notice: Dwyer Instruments, LLC reserves the right to make changes to or discontinue any product or service identified in this publication without notice. Dwyer advises its customers to obtain the latest version of the relevant information to verify, before placing any orders, that the information being relied upon is current.