


# LOW COST DC POWER SUPPLY

## Regulated 1.5 A, 3 A Fuse Protection

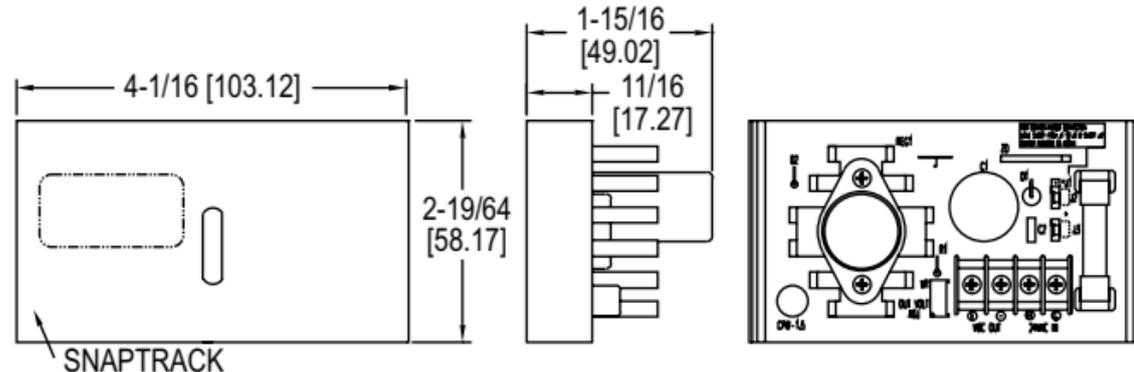

The **Model BPS-015 Low Cost DS Power Supply** is used to convert 24 VAC to a regulated DC power source for transmitters with 4-20 mA outputs. The output voltage can be field adjusted from 1.5-27 V using a potentiometer. The 3 A fuse protects the power supply from over-current conditions. The snap-on bracket can be quickly surface mounted to any flat surface.

### BENEFITS/FEATURES

- Snap track design allowing for easy panel installation
- Regulated 1.5 Amp

### APPLICATIONS

- BAS
- HVAC

### SPECIFICATIONS

**Input:** 24 VAC/VDC 50/60 Hz.

**Output:** 24 VDC (full wave rectified and regulated) adjustable 1.5-27 VDC.

**Maximum Current Output:** 1.5 A (de-rated to 400 mA for non-isolated circuits).

**Temperature Limits:** 32 to 130°F (0 to 55°C).

**Humidity Limits:** 95% (non-condensing).

**Weight:** 0.4 lb.

### MODEL CHART

Model	Description
BPS-015	Power supply