

HEATING TAPES WITH BUILT-IN THERMOSTAT

HTWT101-002-60F



- ✓ Built-In Thermostat Set at 16 °C (60 °F)
- ✓ Moisture and Chemical Resistant
- ✓ Suitable for Electrically Conductive Surfaces

SPECIFICATIONS

Thermostat Setting: 16 °C (60 °F)

Max Exposure Temperature: 232 °C (450 °F)

Nominal Watts per square mm (inch): 0.009 (6.0)


Outer Sheath: Extruded silicone rubber

Construction: Kapton® wrapped fiberglass, knit and braided

Width: 25.4 mm (1 in)

Power Cord: 1.8 m (6 ft) with plug on 120 V models, stripped lead ends on 240 V models

Power: 120 Vac or 240 Vac

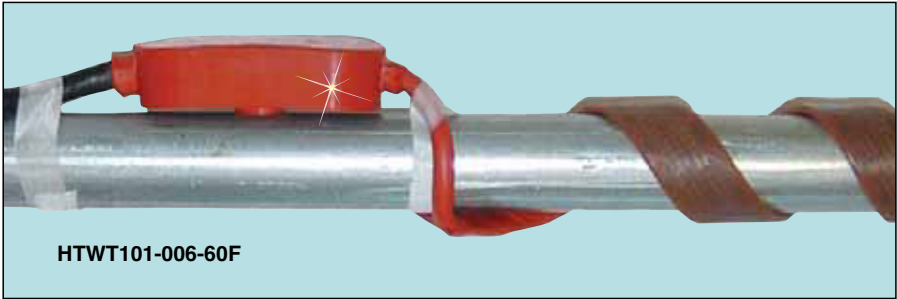

To Order

Model No.	Length mm (in)	Wattage	Voltage
HTWT101-002-60F	610 (24)	104	120
HTWT101-004-60F	1220 (48)	209	120
HTWT101-006-60F	1829 (72)	313	120
HTWT101-008-60F	2438 (96)	418	120
HTWT101-010-60F	3048 (120)	522	120
HTWT102-004-60F	1220 (48)	209	240
HTWT102-006-60F	1829 (72)	313	240
HTWT102-008-60F	2438 (96)	418	240
HTWT102-010-60F	3048 (120)	522	240

Comes complete with operator's manual.

All heating tapes are 25.4 mm (1 in) wide and come with a thermostat set at 16 °C (60 °F).

HEATING TAPES WITH PERCENTAGE CONTROLLER

HTWC100 Series

- ✓ Reliable
- ✓ Integral Percentage Controller
- ✓ Silicone Rubber Encapsulated Heating Tape
- ✓ Maximum Exposure Temperature up to 232 °C (450 °F)

The tape consists of a flexible heating strip 1 in wide and of varying lengths with a permanently incorporated temperature controller. Standard tapes are available for either 120 V or 240 V operation and develop 72 watts per lineal foot. These tapes are completely safe when operated according to directions, and with reasonable care, will give long service.

This economical semi-automatically controlled heating tape has been developed for use in small scale heating applications.

SPECIFICATIONS

Power: 120 V or 240 V

Wattage: 72 watts/lineal foot

Heating Element: Fine gage stranded resistance wires insulated with fiberglass yarn and completely enclosed in a silicone rubber extrusion

Controller: Rugged and dependable percentage controller.

Power Cord:

For 120 V: 72 in with 2 prong plug

For 240 V: 71 in cable with lead wires (no plug)



To Order

Model Number	Watts	Volts	Size
HTWC101-002	144	120	1" x 2'
HTWC101-004	288	120	1" x 4'
HTWC101-006	432	120	1" x 6'
HTWC101-008	576	120	1" x 8'
HTWC101-010	720	120	1" x 10'
HTWC102-002	144	240	1" x 2'
HTWC102-004	288	240	1" x 4'
HTWC102-006	432	240	1" x 6'
HTWC102-008	576	240	1" x 8'
HTWC102-010	720	240	1" x 10'

Comes complete with operator's manual.

DS-HTWC

