



LITESTAK

Indoor Stackable Status Indicator

The Litestak® status indicator is an indoor stackable 24VDC lighting option that provides a 360° visual signal. There can be up to five light modules or up to four light modules plus an optional sound module to create a dual purpose audible/visual status indicator. The light modules are available in five lens colors: Amber, Blue, Clear, Green and Red. The clear module or the sound module is always mounted at the top position of a Litestak® unit if used.

Individual light modules may be set to either steady or flash using the optional flasher. The light modules consist of two impact-resistant polycarbonate lens halves that snap apart to provide easy maintenance and interchangeability of colors. The flasher and sound module are sold separately.

The LSB base can be installed on a 3/4-inch NPT pipe mount or surface mounted and the LSBS for low profile surface mounting. The Litestak® stack should be mounted with the base at the bottom.

The Litestak is covered by ACI's Two (2) Year Limited Warranty. The warranty can be found in the front of ACI's Sensors & Transmitters catalog, as well as on ACI's web site, workaci.com.

PRODUCT SPECIFICATIONS

Supply Voltage:	24 VDC
Operating Current*:	LSL Light Modules: 0.76 amps LHS Piezoelectric Horn: 70mA
Input Types:	Relay
Lamp Life:	2,500 Hours
Light Source:	Incandescent
Light Module Colors:	Amber, Blue, Clear, Green and Red
Horn Decibels:	Adjustable, up to 75-77 dBa @ 10' (85-87 dBa @ 1m)
Operating Temperature:	32-120°F (0-49°C)
Mounting Base Material:	Polycarbonate
Base Color:	Black
NEMA IP Rating:	NEMA 1 IP 10
Product Dimensions:	LSB Base, LSL Module, and LSH Piezoelectric Horn (D x H): 3.93" (99.8mm) x 3.25" (82.6mm) LSBS Base (D x H): 3.93" (33.8mm) x 3.25" (82.6mm)
Product Shipping Weight:	LSL Light Module: 0.8 lbs (0.4 kg) LBS Base: 1.0 lbs (0.4 kg) LSH Piezoelectric Horn: 0.65 lbs (0.3 kg)
Agency Approvals:	UL Listed, CSA Certified



Note*: Operating current listed is for one module. For multiple modules, the current will have to be added together throughout the configuration to get the total operating current.







DIMENSIONS


LSL Light Module and LSH Piezoelectric Horn

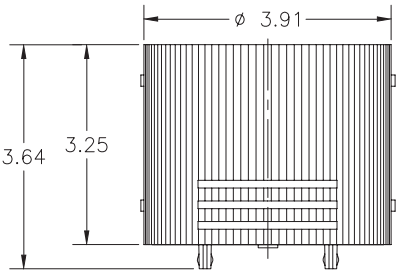

LSB Base

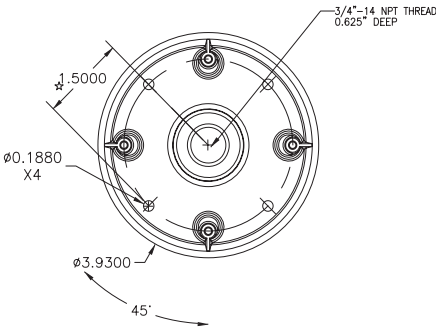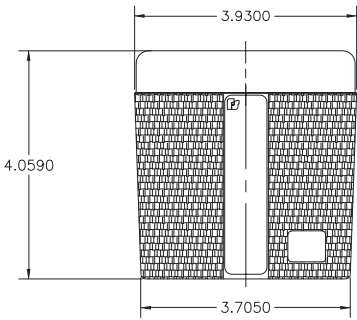

K8285237A Flasher module

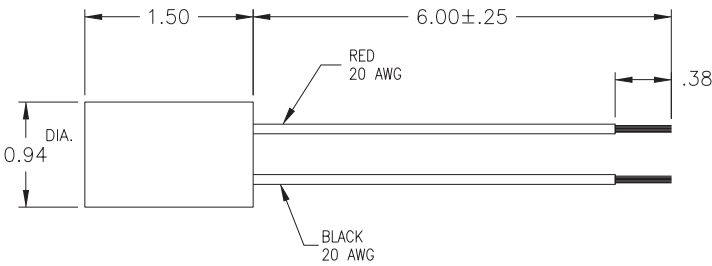

**STANDARD ORDERING | LIGHT MODULE**

Model #	Item #	Description
FSIG-LSL-024A	148902	Light Module, Amber
FSIG-LSL-024B	148903	Light Module, Blue
FSIG-LSL-024C	148904	Light Module, Clear
FSIG-LSL-024G	148905	Light Module, Green
FSIG-LSL-024R	148906	Light Module, Red

STANDARD ORDERING | MOUNTING BASE

Model #	Item #	Description
FSIG-LSB-024-240	148898	Surface mount or 3/4" conduit mount
FSIG-LSBS	148899	Surface mount base

ACCESSORIES

Model #	Item #	Description
FSIG-K8285237A	149007	Flasher Module
FSIG-LSH-024	149008	Piezoelectric Horn

