


# Connector Accessories

## For Miniature Size Connectors

### Wire Caddy (Spool Cap)

#### To Order


| Model No. |           | Compatible Connectors |                                               |
|-----------|-----------|-----------------------|-----------------------------------------------|
| SMP-SC    | pkg of 5  | SMPW, HMPW            | Designed with integrated connector cap (grey) |
| SWHCL     | pkg of 20 | SMPW, HMPW            | Mounted under existing connector cap          |

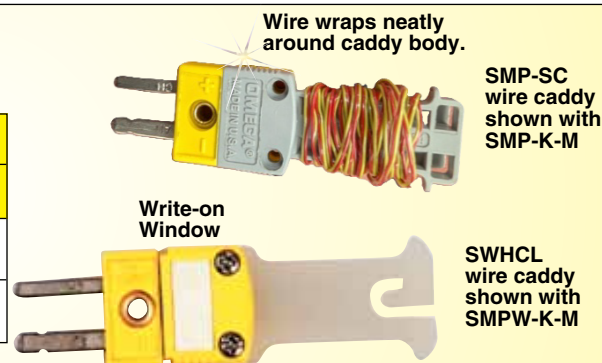

### Dual Element Tube Clamp

| Model No.       | Compatible Connectors |
|-----------------|-----------------------|
| DX-BRLK-(*)-SMP | SMPW, HMPW            |

\*Insert probe diameter: "116" for 1/16", or "18" for 1/8"

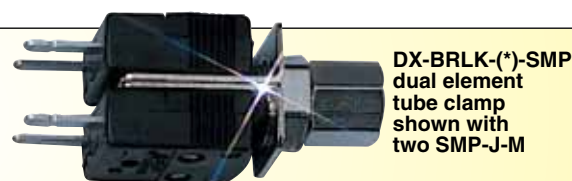

### Ferrite Cable Clamp (300 series stainless steel)

| Model No.       | Compatible Connectors |
|-----------------|-----------------------|
| PCLM-SMP-FT     | SMPW, GMP, HGMP       |
| PCLM-SMP-RSC-FT | HMPW, MTP             |



### Cable Clamp

| Model No.    | Compatible Connectors          |
|--------------|--------------------------------|
| PCLM-SMP     | SMPW, HMPW (<0.8" OD)          |
| PCLM-SMP-RSC | SMPW, HMPW (1/8" OD and above) |
| PCLM-GMP     | GMP, HGMP                      |
| PCLM-NMP     | NMP                            |
| PCLM-SHX     | SHX-MF                         |



### Miniature Strain Relief Tubing (Material: Silicone)

| Model No.    | Compatible Connectors |
|--------------|-----------------------|
| MSRT-116-(*) | SMPW, HMPW, GMP, HGMP |
| MSRT-332-(*) |                       |
| MSRT-532-10  |                       |

\*Insert quantity: select from packages of 5, 10, 50, 100. Center number denotes tubing inside diameter: "316" for 3/16", "332" for 3/32", "532" for 5/32".



### Rubber Boots

| Model No. | Material        | Compatible Connectors |
|-----------|-----------------|-----------------------|
| MRB       | Buna-N (black)  | SMPW, HMPW            |
| MRBS      | Silicone (grey) | SMPW, HMPW            |

MRB rated to 200° MRBS rated to 450°



# Connector Accessories

## For Miniature Size Connectors

### Safety Clip

#### To Order

| Model No. | Compatible Connectors  |
|-----------|------------------------|
| SMCL      | SMPW, GMP, HMPW, HGMP  |
| FMCL      | FMP, FMPW, HFMP, HFMPW |


### Safety clip SMCL

Shown with GMP-T-MF




### Panel Mounting Bracket (Standard and Round Hole)

| Model No. | Style    | Compatible Connectors | "A" Dimension |
|-----------|----------|-----------------------|---------------|
| SMACL     | Standard | SMPW, GMP, HMPW, HGMP | 0.88"         |
| MACL      | Standard | NMP                   | 0.88"         |
| SRMACL    | Round    | SMPW, GMP, HMPW, HGMP | 0.67"         |
| RMACL     | Round    | NMP                   | 0.67"         |




SRMACL round hole panel mounting bracket.



SMACL panel mounting bracket.


### Wire Hole Reducer-For Smaller Gauge Wires SMPW Connectors

| Model No.  | Pkg of 20 | Reduced Hole Opening |
|------------|-----------|----------------------|
| RB-SMP-100 |           | 2.54 (0.100") Dia.   |
| RB-SMP-140 |           | 3.55 (0.140") Dia.   |

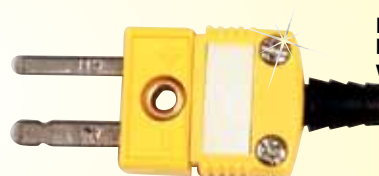

RB-SMP-100 wire hole reducers shown with SMPW-K-M

### Dimensions: mm (inch)

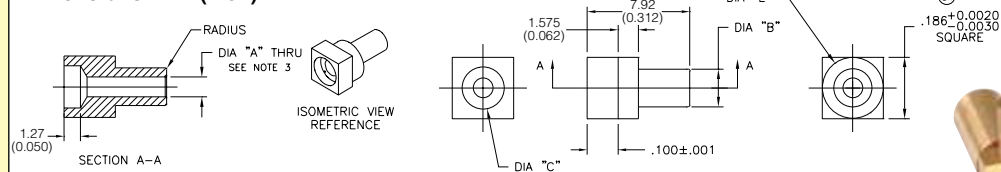

### Crimp Style Bushing

| Model Number          | Dia A-ID mm (in) | Dia B-OD mm (in) | Dia C mm (in) | Dia E mm (in) | Compatible Connectors               |
|-----------------------|------------------|------------------|---------------|---------------|-------------------------------------|
| (*)B-SMP-CR020-(**)   | 0.56(0.022)      | 2.95 (0.116)     | 3.25 (0.128)  | 4.72 (0.186)  | SHX, NMP, MTP, GMP, SMP, SMPW, FMPW |
| (*)B-SMP-CR032-(**)   | 0.89 (0.035)     | 2.95 (0.116)     | 3.25 (0.128)  | 4.72 (0.186)  |                                     |
| (*)B-SMP-CR040-(**)   | 1.09 (0.043)     | 2.95 (0.116)     | 3.25 (0.128)  | 4.72 (0.186)  |                                     |
| (*)B-SMP-CR1.5MM-(**) | 1.57 (0.062)     | 2.95 (0.116)     | 3.25 (0.128)  | 4.72 (0.186)  |                                     |
| (*)B-SMP-CR062-(**)   | 1.65 (0.065)     | 2.95 (0.116)     | 3.25 (0.128)  | 4.72 (0.186)  |                                     |
| (*)B-SMP-CR093-(**)   | 2.44 (0.096)     | 4.72 (0.186)     | 3.96 (0.156)  | N/A           |                                     |
| (*)B-SMP-CR3.0mm-(**) | 3.10 (0.122)     | 4.72 (0.186)     | 3.96 (0.156)  | N/A           |                                     |
| (*)B-SMP-CR125-(**)   | 3.25 (0.128)     | 4.72 (0.186)     | 3.96 (0.156)  | N/A           |                                     |

(\*) Insert "B" for brass or "S" for stainless steel  
(\*\*) Insert quantity: "10" or "100." "CR" number indicates compatible probe diameter.

To order crimping tool for use with these bushings, specify model number **BB-SMT-CT**.

**Ordering Example:** SB-SMP-CR040-100, pkg of 100 crimp style stainless steel bushing for 0.043 Dia. probe.

### Clamp Grommets Silicone 0.25" long

| Model No.       | Inside Diameter | Outside Diameter | Length       | Compatible Connectors |
|-----------------|-----------------|------------------|--------------|-----------------------|
| SSRT-CC-018-(*) | 3.18 (0.125)    | 4.77 (0.188)     | 6.35 (0.250) | OSTW male or female   |
| SSRT-CC-332-(*) | 2.38 (0.094)    |                  |              |                       |
| SSRT-CC-116-(*) | 1.59 (0.063)    |                  |              |                       |
| SSRT-CC-132-(*) | 0.79 (0.032)    |                  |              |                       |

\*Insert pkg quantity: select from packages of 5, 10, 50, 100.

Center number denotes grommet inside diameter for 0.75" long strain relief tubing, visit [omega.com](http://omega.com)

**PATENTED**  
Covered by U.S. and International patents and pending applications.

