

Release Note

Product Name: PM100

Version: V1.2.7

Release Date: April 2019

What's New?

This firmware version release implements changes for expanded calibration features in the PM100 monitors.


Installation Instructions

Installation

This firmware version requires PM Link software version 1.7.0.

Installing the new version:


1. Download the new firmware .bin file (Make sure to remember where the new firmware is saved on the PC)
2. Connect the PM Link to the PC
3. Place the PM100 in front of the PM Link aligning the IR window on the PM100 with the PM Link
4. Launch the PM Link software
5. Click the OPEN button to establish communication with the PM100 and the PM Link PC Read Complete popup window will appear. Click the OK button.



In the Basic Operation section, the current firmware version will be displayed.

Firmware Version 1.2.5

6. Click on Firm icon and the Firmware Upgrade popup window will appear

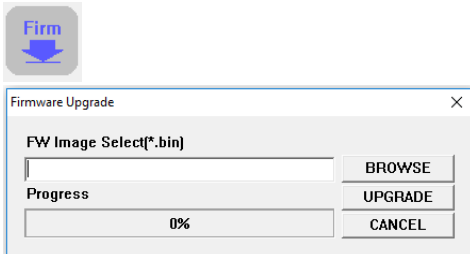

7. Click on the BROWSE button and locate the new firmware .bin file (Typically in Downloads)


8. Click on the appropriate .bin file to select if, then click the Open button
9. Ensure that the PM100 is still properly located in front of the PM Link
10. Click on the UPGRADE button

UPGRADE


11. The display on the PM100 will display IAP the SLP and the Progress bar on the software will indicate the progress of the firmware installation. (It should take less than 30 seconds to update the firmware)

Progress
60%



Once the firmware has upgraded, the PM100 will automatically reboot and the Firmware Upgrade Success popup window will be displayed on the PC. Click the OK button.



12. Click the X button on the Firmware Upgrade popup window to close the upgrade window

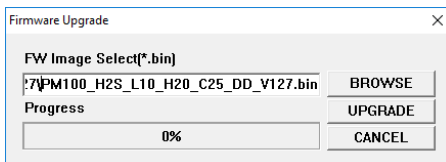

13. Click the OPEN button (as described in step 6) to establish communication with the PM100 and the PM Link PC Read Complete popup window will appear. Click the OK button.



In the Basic Operation section, verify that the new firmware has been loaded.

Firmware Version 1.2.7

14. The firmware upgrade is complete

Contact Technical Support with any questions

Phone: (844) 325-3050

Email: support@aimsafety.com